

MOM200P

Digital Micro Ohm Meter

میکرو اهم متر دیجیتال



The complete toolbox for measuring contact resistance in the micro ohm range by applying high current to both ends.

Features

- Resistance measurement range: $1\mu\Omega$ to $130m\Omega$
- Output current: up to 200 A DC
- Output voltage: up to 5 V DC
- Output power: up to 1 KW
- Portable and heavy-duty case
- Extremely reliable and easy to use
- PC control with MOMSOFT software

Applications

- Circuit breaker manufacturers
- Repair and maintenance of electrical power plant companies
- Electrical power plant EPC companies
- Electrical power labs
- Big factories e.g. Steel, petrochemicals, refineries, and ...



TAPCO®
TARASHE PARDAZE POOYA

MOM200P Specifications

Specifications are valid at nominal input voltage and an ambient temperature of +25°C, (77°F).
Specifications are subject to change without notice.


General

Type	Portable Digital Micro Ohm Meter (Contact Resistance Meter)
Input Power	220 V AC / 50 Hz/ 1.1 KW
Dimensions (L x W x H)	Basic Unit: 460 x 330 x 120 mm
Weight	10.5 kg
CE Marking	EMCD 2014/30/EU

Measurement

Resistance Measurement Range	1μΩ To 16mΩ (±1 μΩ) 10μΩ To 130mΩ (±10 μΩ)
Output Test Current	30 to 200 A DC
Output Voltage	Up to 5 V DC
Output Power	Up to 1 KW
Accuracy	±1% reading ± 1dgt
Maximum Continuous Test Time	15 Seconds @ 200 A, 25°C Ambient

Measurement Regarding By Variant Cable Length

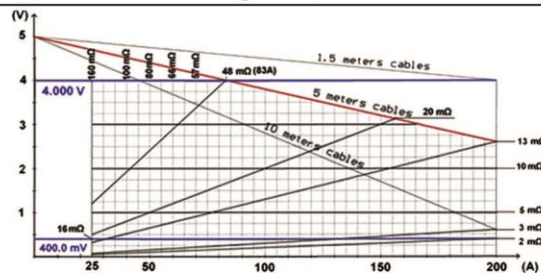

Cable=1.5 Meter , I=200A , Max Resistance Measuring=20 mΩ

Cable=5 Meter , I=200A , Max Resistance Measuring=13 mΩ

Cable=10 Meter , I=200A , Max Resistance Measuring=3 mΩ

Environment

Operating Temperature	-20 to 55 °C (-4 to 131 °F)
Storage Temperature	-30 to 70 °C (-22 to 158 °F)
Humidity	20% - 95% RH , Non-Condensing

Miscellaneous

Storage Capacity For Over 500 Ohm Values and 140 Ohm Curves
Internal Thermal Printer
USB and RS-232 Interface
PC Software

Accessories

<p>Current Test Lead Set (2 x 7m with Clamps)</p>	<p>Voltage Test Lead Set (2 x 7m with Clamps)</p>
<p>Earthing Cable (4m with Clamp)</p>	<p>Power, USB & RS232 Cables</p>
<p>Case Cover</p>	<p>Cable Bag</p>

One Year Warranty, Five Years After Sales Services